

Ultrasonic Thickness Gauges

Communicator Software

For use with the Topside Repeater and ROV Gauges

Tritex Communicator software displays live measurement results from either the Multigauge 3000 Underwater Thickness Gauge or the Multigauge 4000 series ROV Thickness Gauges onto either a laptop or PC.




Templates can be preset based on a grid, string of measurements or a combination of both. This gives maximum versatility for a wide range of applications including measurements on pipelines, pilings or ship hulls.

As well as storing measurement data, Communicator software also has the option to store the time, date and an identifying label for each measurement. In addition, various settings within either gauge can be changed from the software to optimise performance.

Features:

- ★ **Displays real time measurements from the Multigauge 3000 or Multigauge 4000 gauges.**
- ★ **Easy to install and very user friendly.**
- ★ **Datalogging with grid or string templates, or a combination of both, easily setup with a wizard.**
- ★ **Bi-directional to allow settings in the gauge to be changed.**
- ★ **Accepts RS232 or RS422 input.**
- ★ **Time, date and a label can be added to each measurement value.**
- ★ **Common output interface (.csv).**

simple . accurate . robust

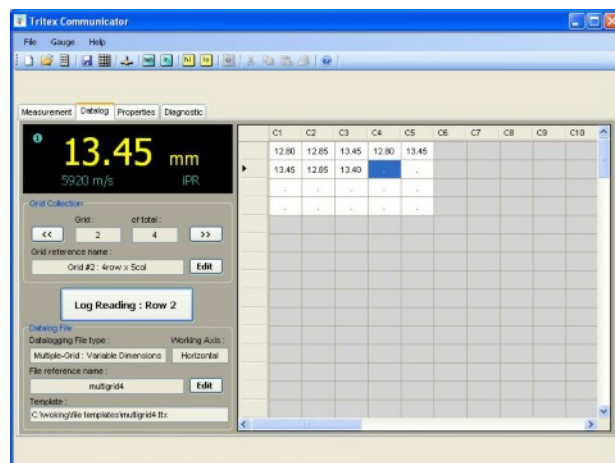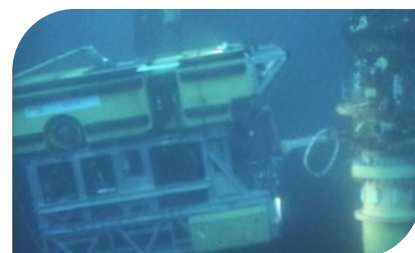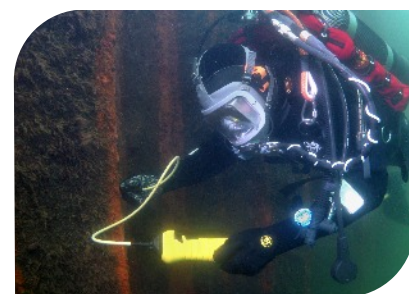

Contact

UK Office:

Tritex NDT Ltd
Unit 10, Mellstock Business Park,
Higher Bockhampton, Dorchester,
Dorset, United Kingdom, DT2 8QJ
t: +44 (0) 1305 257160
f: +44 (0) 1305 259573
e: sales@tritexndt.com
w: www.tritexndt.com

USA Office:

Tritex NDT LLC
1533 Stuyvesant Avenue,
Union, New Jersey,
07083, United States
t: +1 908 688 6706
f: +1 908 688 9040
e: sales.us@tritexndt.com
w: www.tritexndt.com



De Hoogjens 22
4254 XWSleeuwijk
The Netherlands
T: +31-183-307900 F: +31-183-307910
E: info@seascape.nl www.seascape.nl

www.tritexndt.com